


DIMENSIONS	
A	3-3/4"
B	3"
C	2"
D	4-1/4"
E	2-1/2"

CONSTRUCTION INFORMATION SIGN		WDS - 408	
	<small>RECOMMENDED</small> <small>MANAGER OF ENGINEERING</small>	<small>APPROVED</small> <small>DIRECTOR OF ENGINEERING</small>	
	<small>DATE: 03-2023</small>	<small>SCALE: N.T.S.</small>	<small>SHEET 1 OF 2</small>

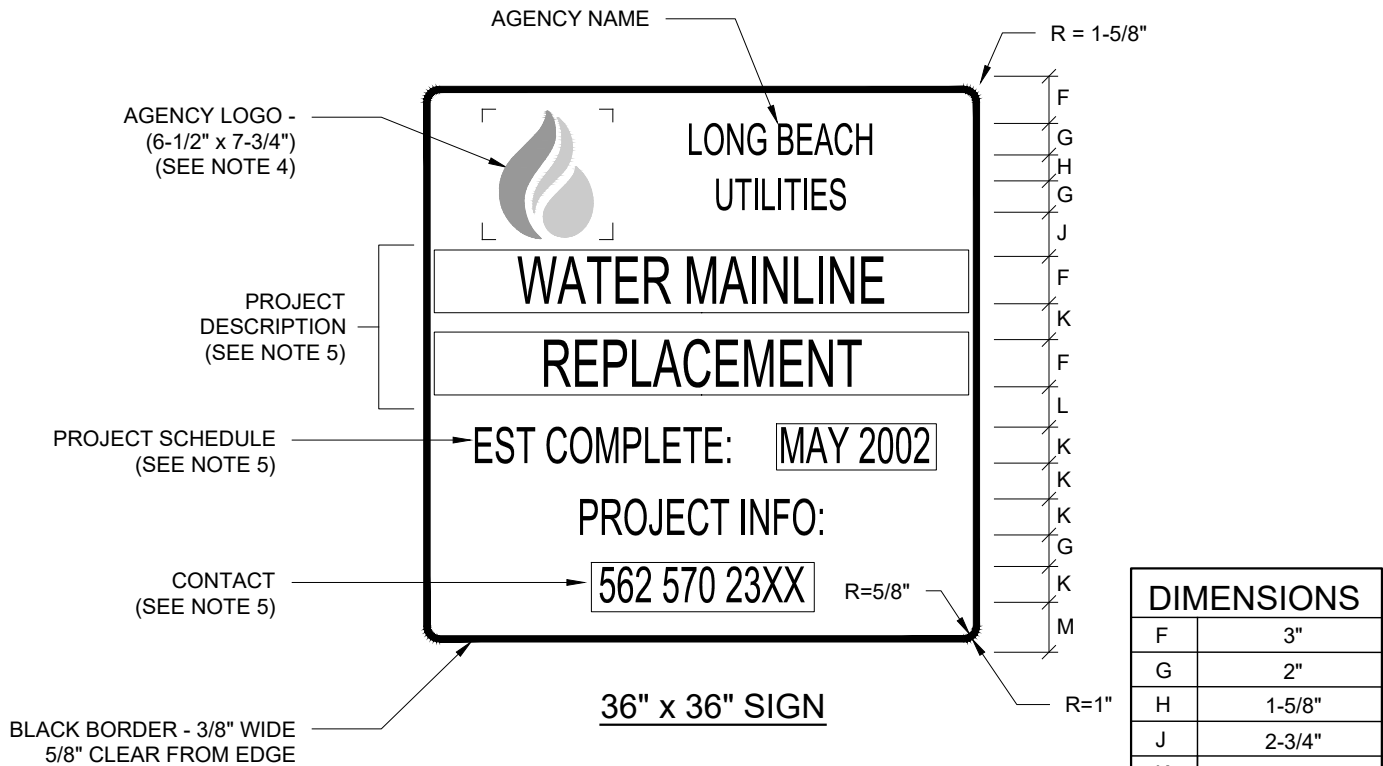

NOTES:

1. USE 48"x48" SIGNS EXCEPT WHERE SIGNS WILL INTERFERE WITH PEDESTRIAN ACCESS. OTHERWISE, USE 36"x36" SIGNS. SIGNS ARE REQUIRED FOR ALL STREET, HIGHWAY AND UTILITY PROJECTS LASTING TWO WEEKS OR MORE.
2. SIGNS SHALL BE FURNISHED BY THE CONTRACTOR OR PERMITEE. POST AT LEAST TWO SIGNS PER EACH WORK LOCATION; ONE SIGN AT EACH END OF STREET WORK, AND ONE AT EACH SIDE STREET WITH A CURB-TO-CURB WIDTH OF 36' OR GREATER.
3. SIGNS SHALL BE ALUMINUM, 1/16" THICK, ENGINEERING GRADE. BACKGROUND SHALL BE NON-REFLECTIVE WHITE. TEXT SHALL BE BLACK.
4. FOR LBUD PROJECTS, LBUD WILL FURNISH LBUD'S LOGO IN COMPUTERIZED FORMAT, IF NEEDED.
5. OVERLAY PLATE AREAS SHOWING JOB-SPECIFIC TEXT TO BE OBTAINED FROM LBUD BEFORE SIGN FABRICATION. OVERLAY PLATES SHALL BE ALUMINUM WITH COLORING AND TEXT MATCHING MAIN SIGN. OVERLAY PLATES SHALL BE MECHANICALLY ATTACHED.
6. INSTALL SIGNS ON EXISTING STREET LIGHT POLES, IF AVAILABLE. OTHERWISE, FURNISH NEW POSTS. INSTALL SIGNS PER CITY OF LONG BEACH PUBLIC WORKS STANDARD PLAN LB - 317.
7. POST SIGNS BEFORE BEGINNING WORK. REMOVE SIGNS AFTER COMPLETING WORK, PER ENGINEER'S APPROVAL, AND DELIVER TO LBUD WAREHOUSE. THE WORK WILL NOT BE GIVEN FINAL ACCEPTANCE UNTIL THE SIGNS ARE DELIVERED.

CONSTRUCTION INFORMATION SIGN

WDS - 408



RECOMMENDED

Jimmy Huang, Uj
MANAGER OF ENGINEERING

APPROVED

Robert J. [Signature]
DIRECTOR OF ENGINEERING

DATE: 03-2023

SCALE: N.T.S.

SHEET 2 OF 2